WALL MOUNT BOX - MTZ

DIVUS TOUCHZOINE

GENERAL INSTRUCTIONS

Installation instructions

The wall mount box an the mounting kit may be installed in a cut out in the wall, in a wooden structure thick at least 1,5 cm or in a dry mortarless construction. The cut out has to respect the sizes specified in the technical data and has to be at least 9 cm deep.

In the wall cut out, the box can become build in while it can be screwed on in a piece of furniture. It is important that the fore edge of the MTZxx is flat and horizontally to the surface of the wall or the piece of furniture.

DEVICE CODES

Compatibility	in wall mount box	in mortarless mount kit	in wall mount box	in mortarless mount kit
DTZ07	normal mount		flush mount	
	MTZ07	MTZ07-T	MTZ07-W	MTZ07-WT
Technical Data				
Type of design	compact, stable and flat wall mount box	compact mounting kit for mor- tarless constructions	compact flush mount kit	compact flush mount kit for mortarless constructions
Weight	ca. 0,2kg	ca. 0,3kg	ca. 0,2kg	ca. 0,3kg
Dimensions [mm]				
cut-out	129×210	129×210	141×220	141×220
required space	129×210×75	190x210x75	141×220×80	190×210×80
Mechanical Character	ristics			
Wall mount box	steel plate with cover for clean installation			
Cable access	Ixbottom, Ixleft			
Grounding	the MTZxx needs to be professionally grounded			



DESIGN FRAME - PRODUCT SIZE

Dimensions	ТZ07
Outside with Frame [mm]	136 × 213
Weight	0,9 kg


All data refer on print date, errors and changes excepted.



CUT-OUT DIMENSIONS [mm]

IN WALL MOUNT BOX - NORMAL MOUNT


MTZ07

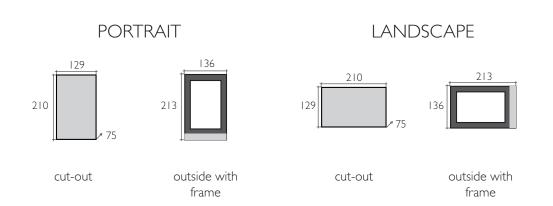



IN MORTARLESS MOUNT KIT - NORMAL MOUNT

MTZ07-T

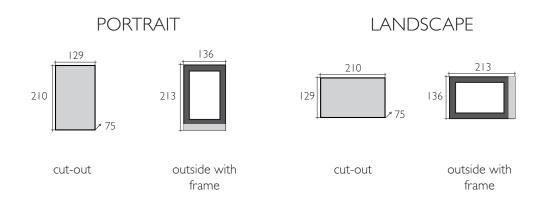




CUT-OUT DIMENSIONS [mm]

IN WALL MOUNT BOX - FLUSH MOUNT

MTZ07-W

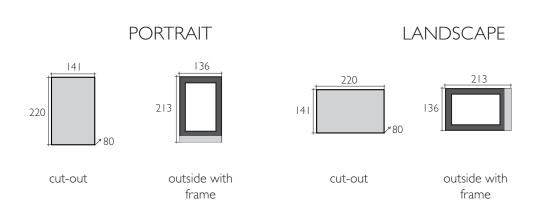



IN MORTARLESS MOUNT KIT - FLUSH MOUNT

MTZ07-WT

